

# Service Bulletin

NO.1284

Revised July, 1992


December 12, 1991

**Subject: Cover sub-assembly and Charge Pump (Pump Plate)  
Model 11 Transmissions, Model 11 Pumps, 1150 Transaxles, with  
external charge pump inlet.**

Current cover sub-assemblies are manufactured *without* thru holes between the charge pump *pump plate* and internal case, a bleed hole was added to the pump plate.

**Note:** Current Cover sub-assembly *without* thru holes, requires Pump Plate *with* bleed hole.

Cover sub-assembly *with* thru holes will require the Pump Plate *without* bleed hole.

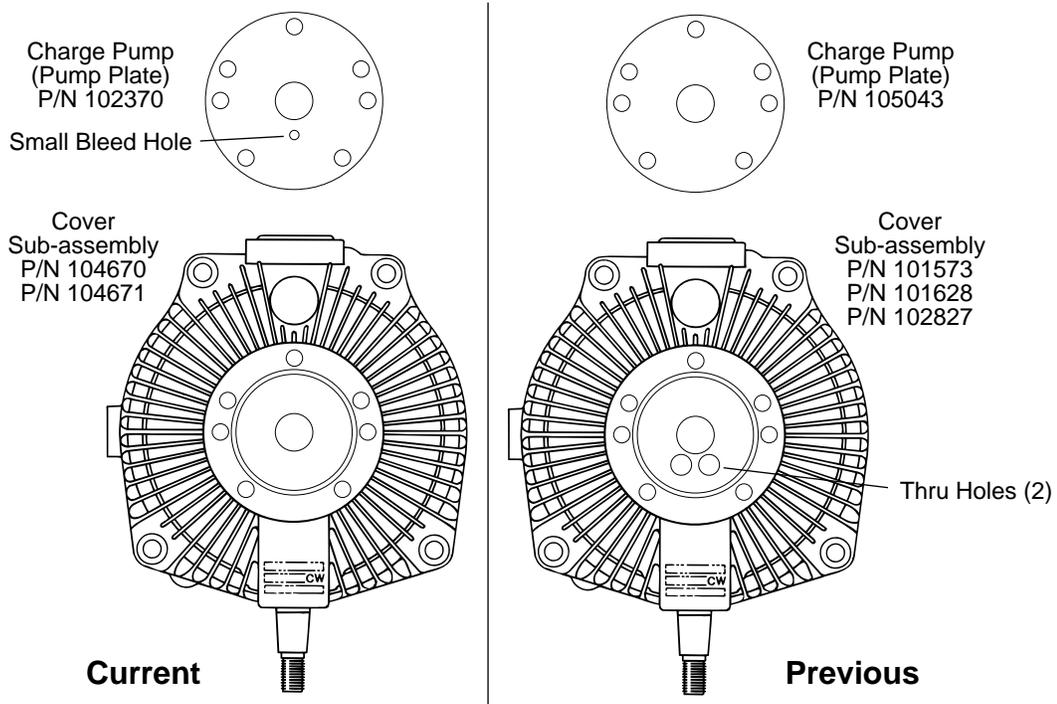

Eaton Corporation  
Hydraulics Division  
15151 Hwy. 5  
Eden Prairie, MN 55344  
Telephone 612/937-9800  
Fax 612/937-7130

Eaton Ltd.  
Hydraulics Division  
Glenrothes, Fife  
Scotland, KY7 4NW  
Telephone 01-592-771-771  
Fax 01-592-773-184

Eaton GmbH  
Hydraulics Products  
Am Schimmersfeld 7  
40880 Ratingen, Germany  
Telephone 02102-406-830  
Fax 02102-406-800



Quality System Certified  
Products in this catalog are manufactured  
in an ISO-9001-certified site.

---

**EAT•N**