

Piston Pumps



45 USgpm Fixed Inline Piston Pumps

(M) - PFB45 - (F)RF - 10/11

(M) - PFB45 - (F)LF - 10/11

F6 - PFB45 - (F)*F - 10/11


■ INCLUDED IN 938286 ROTATING GROUP KIT FOR PFB45 ONLY.


● INCLUDED IN VALVE PLATE KIT.

▲ INCLUDED IN S/B 923000 OBS SEAL KIT FOR PFB45 MODELS ONLY.

FLANGE CONNECTIONS (NOT FURNISHED WITH UNIT)		
MODEL	PIPE SIZE	TYPE
FL1-16-16P-10	2"	PIPE THREADED
FLI-16-16W-10		PIPE WELDED
FLANGES ARE FURNISHED WITH A SEAL AND SCREWS FOR FASTENING		



MODEL	PLUG (2 REQ'D)	VALVE PLATE	BEARING	VALVE PLATE S/A KIT
PFB45-RF-10	—	391126	281655	—
PFB45-LF-10	—	391125		
F6-PFB45-RF-10	—	314790	●388176	941206
F6-PFB45-LF-10	—	314787		
F6-PFB45-RF-11	●402168	●381289		
F6-PFB45-LF-11	—	381288		

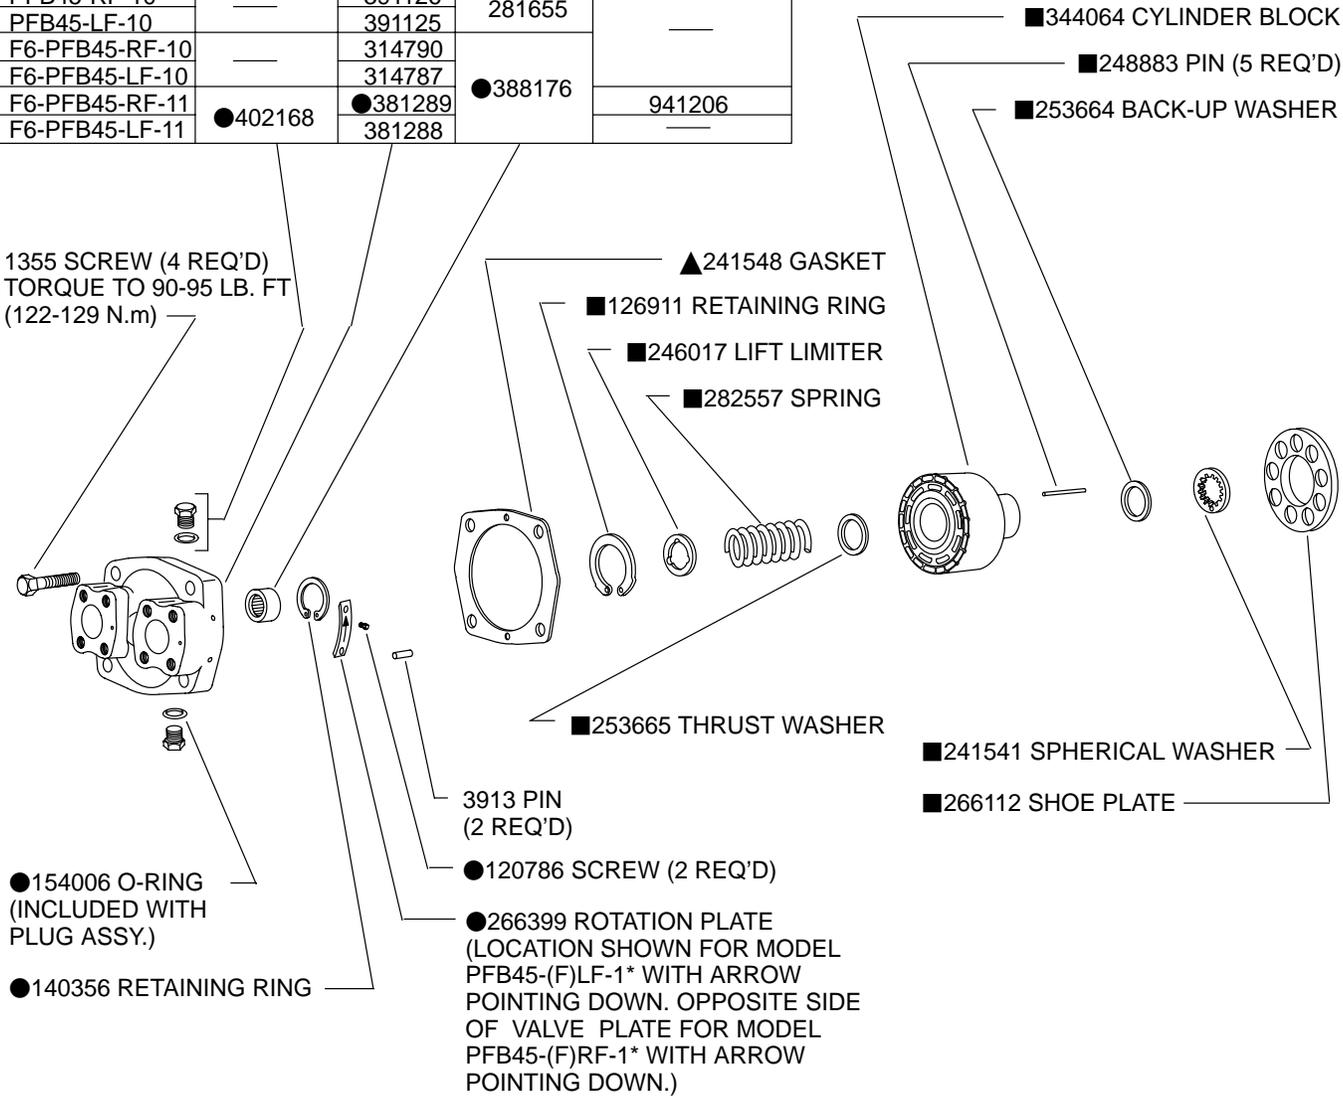

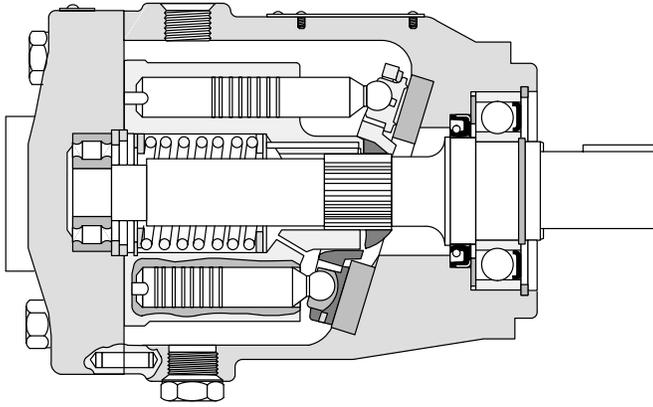


MODEL	HOUSING
PFB45-*F-10	266108
F6-PFB45-*F-10	314782
F6-PFB45-*F-11	374913

MODEL	SPACER	BEARING
PFB45-*F-10	273385	283662
F6-PFB45-*F-10	-	
F6-PFB45-*F-11	381298	119541

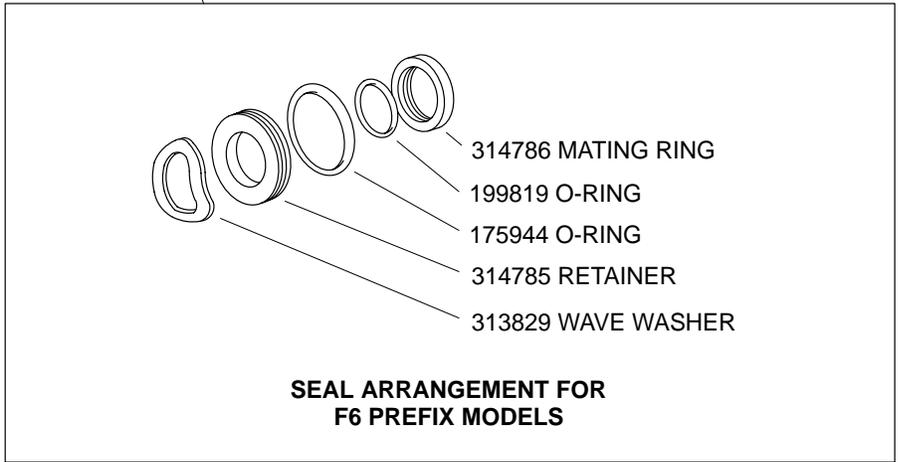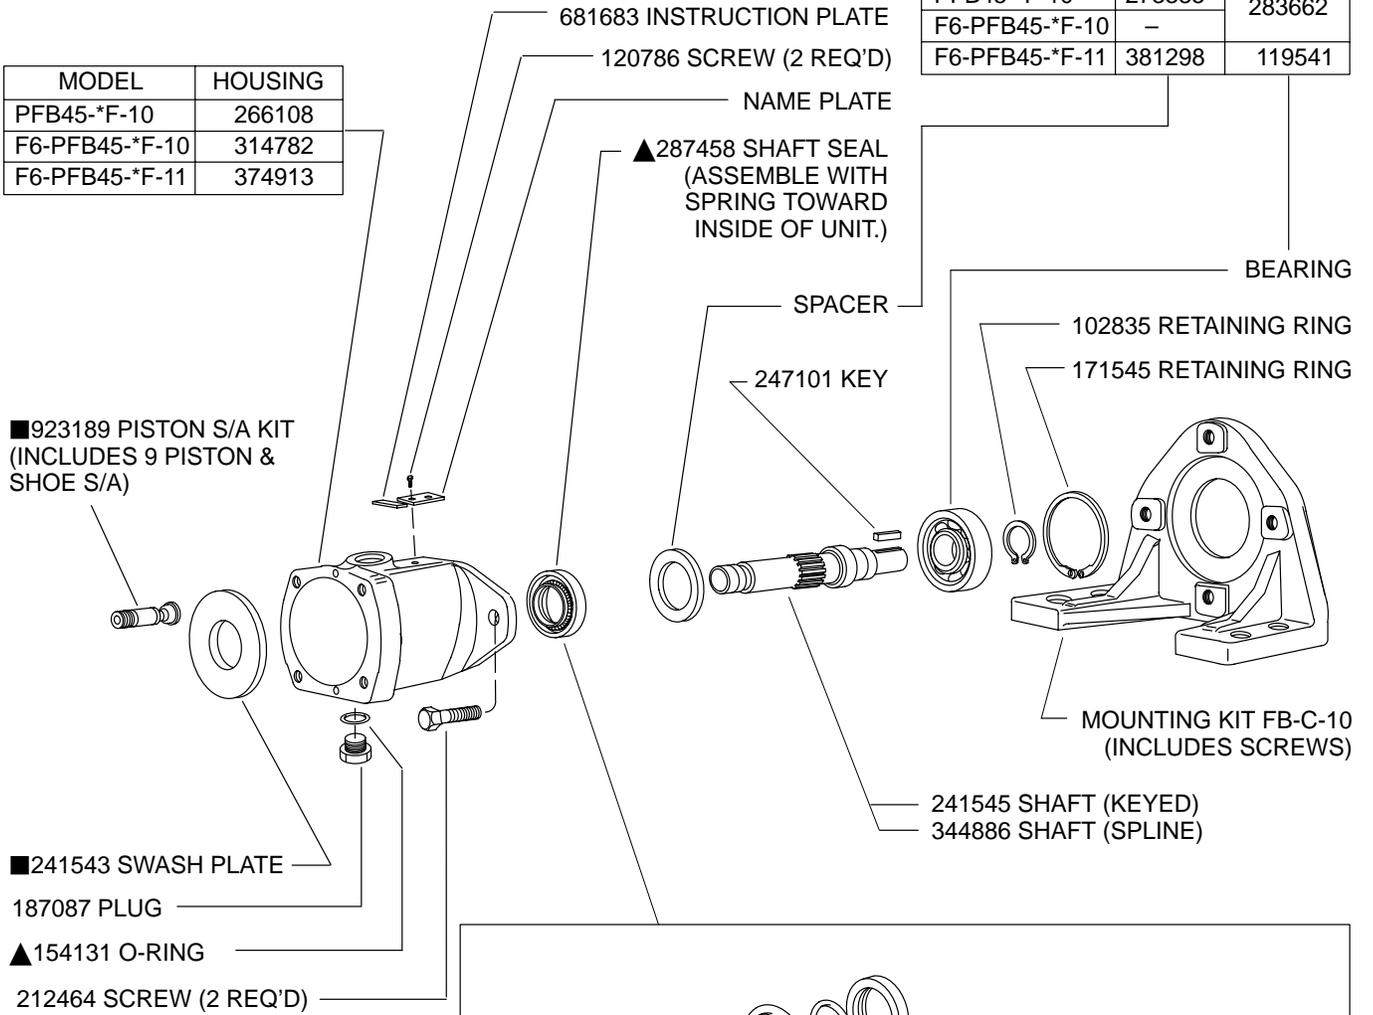

Model Code

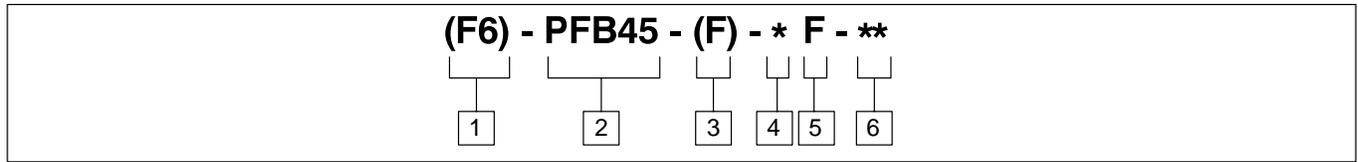

1 Seals

F6 - For use with specified soluble oils or petroleum base fluids.
Omitted- (Standard) for use with petroleum base fluids only.

2 Fixed Displacement Pump

PFB45 - Inline type, rated at 12 L/min (45 USgpm) at 1800 RPM.

3 Mounting Type

F - Foot bracket mounted
Omitted - Flange mounted

4 Rotation

(Viewed from shaft end)
R - Right hand
L - Left hand

5 Flange Ports

SAE 4-bolt

6 Design

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 16/13 or cleaner. Selections from pressure, return, and in-line filter series are recommended.