


Relief Valves




Balanced Piston Type Relief & Sequence Valves

CG-06-*(V)(Y)-50

Model	■ Cover	Spring (Outer)	Spring (Inner)	■ Spring	Pressure Range PSI	■ Included in Cover S/A
CG-06-B-50	581702	184458	2077	2280	125-1000	941280
CG-06-BV-50						941283
CG-06-BVY-50	590315	184458	2077	583937	500-2000	941281
CG-06-BY-50						941284
CG-06-C-50	581702	184458	2077	2281	1500-3000	941282
CG-06-CV-50						941285
CG-06-CVY-50	590315	184458	2077	2281	1500-3000	941282
CG-06-CY-50						941285
CG-06-F-50	581702	184458	2077	2281	1500-3000	941282
CG-06-FV-50						941285
CG-06-FVY-50	590315	184458	2077	2281	1500-3000	941282
CG-06-FY-50						941285

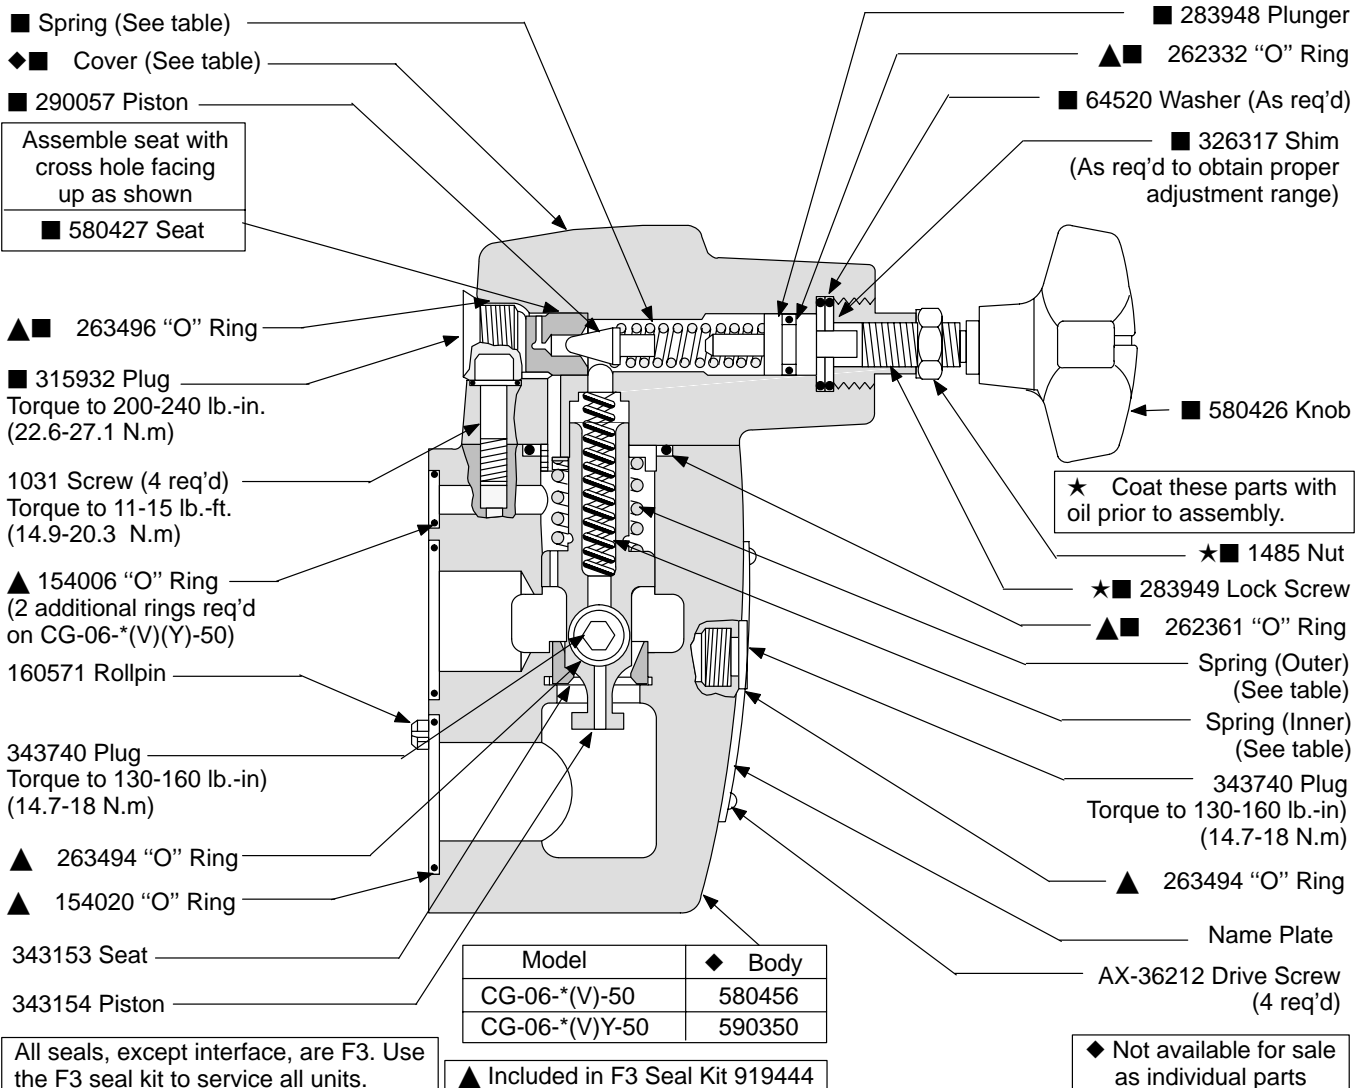

Model Code Breakdown

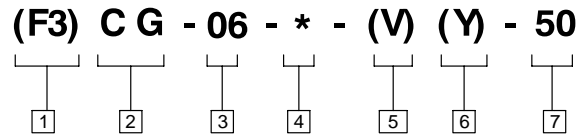

1 Seals

F3 - Multi-fluid capability (Viton® seals)

Viton is a registered trademark of E.I. DuPont

2 Model Series

CG - Relief valve, manifold or subplate mounted

3 Size

06 - 3/4 inch

4 Pressure Range

B - 125-1000 PSI
C - 500-2000 PSI
F - 1500-3000 PSI

5 Vent Pressure

V - High vent pressure
(Omit for standard vent pressure.)

6 External Drain Feature

Y - Sequence valve
(Omit for standard relief.)

7 Design

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from Eaton OFF, OFR and OFRS filter series are recommended.

Printed in U.S.A.